

Frese ball valve


Application

Full flow ball valves with handle for cooling and heating systems.



Technical data

Valve Housing:	DZR Brass
Gasket:	PTFE
Pressure rating	PN16
Temperature:	See temperature and pressure diagram
Connections:	Female/Male or Female/Female

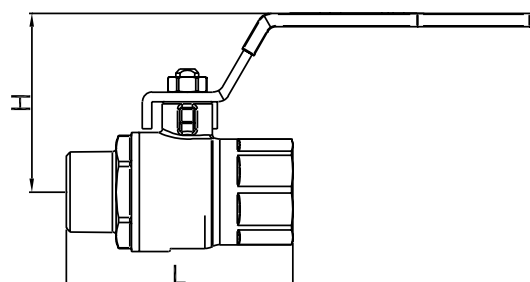


Female/Male	Frese no.	Dimensions	L (mm)	H (mm)
	38-5020	DN15	60	44
	38-5022	DN20	66	47
	38-5024	DN25	78	55
	38-5026	DN32	96	75
	38-5028	DN40	103	82
	38-5030	DN50	125	94

Female/Female	Frese no.	Dimensions	L (mm)	H (mm)
	38-5032	DN15	54	44
	38-5033	DN20	61	47
	38-5034	DN25	72	55
	38-5035	DN32	83	75
	38-5036	DN40	93	82
	38-5037	DN50	111	94

Pressure temperature diagram

At each pressure level corresponds a specific admissible temperature level and vice versa

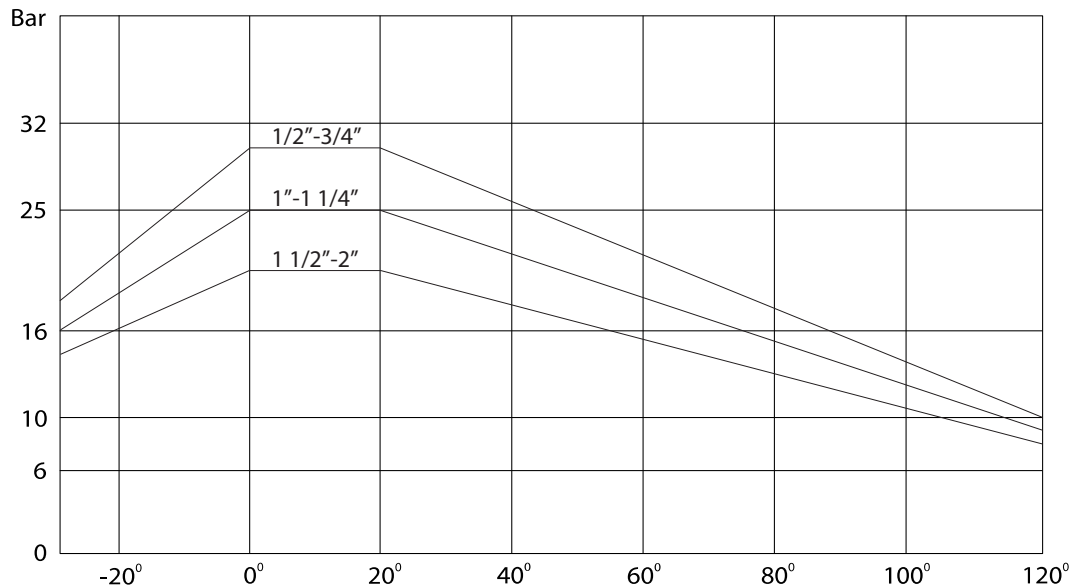

Frese A/S assumes no responsibility for errors, if any, in catalogues, brochures, and other printed matter. Frese A/S reserves the right to modify its products without prior notice, including already ordered products, if this does not alter existing specifications. All registered trademarks in this material are the property of Frese A/S. All rights reserved.

Frese A/S
 Sorøvej 8
 DK- 4200 Slagelse
 Tel: +45 58 56 00 00
 Fax: +45 58 56 00 91
 info@frese.dk